

The **STD-34** is a contact-less optical reflective absolute position sensor. It has Integrated dual sensing heads and advanced processing, which gives it a very high precision over a low profile and redundant core.

The **STD-34** support SSI & BiSS-C interfaces.

The wide assembly tolerance of the **STD-34** makes it easy to install and align, its plug and-play approach makes it simple to design into any application.

High precision single turn, optical reflective absolute position sensor

- Contact less
- Dual core, redundant - Duplus core technology
- Low profile
- High resolution
- High accuracy

Dimensions

OD stator	mm	34
Shaft	mm	4
Height	mm	10

Environment Condition's

Temperature, operational	-40 to 100 C°
Humidity	95% relative humidity, Non condensing, IEC 60068-2-78
IP rating	IP 50
Shock	1000 m/s ² , 6 ms, ½ sine, 3 axes
Vibration	100 m/s ² max @ 55 Hz to 2000 Hz, 3 axes
EMC compliance	IEC 61326-1



STD-34


Absolute Position Sensor



Characteristic's


Resolution ¹	bit	18 - 22
Accuracy [INL]	mdeg	± 2
Repeatability	count	± 1
Data latency	µsec	20
Startup time	msec	20
Current consumption	mA	150
Power supply	VDC	5 ± 5%
Rotation speed, max	RPM	5,000
Rotor moment of inertia	Kgm ²	< 8 x 10 ⁻⁸
Shaft load (at shaft end):		
- Axial	N	5
- Radial		
Starting torque @20° C	mNm	< 0.5
Weight	gr	50

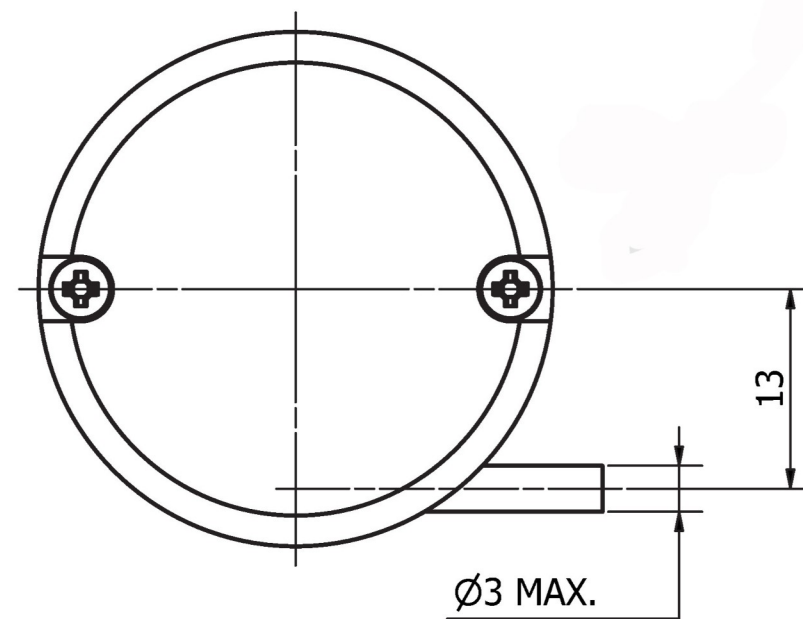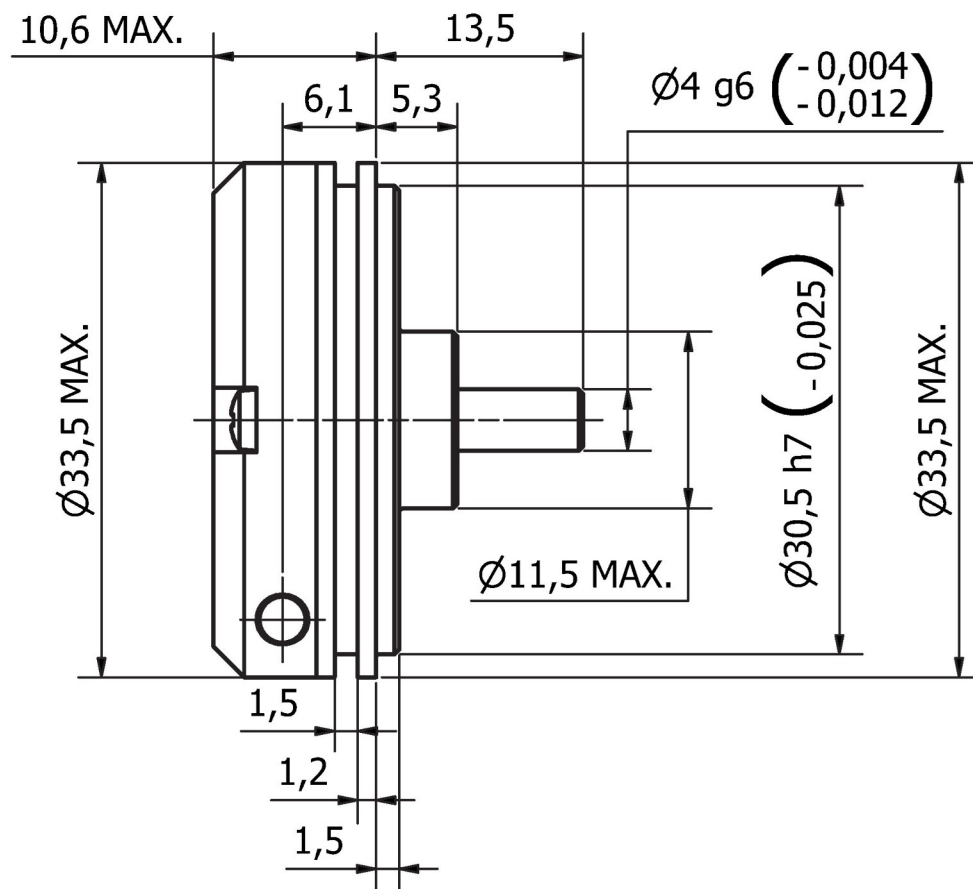

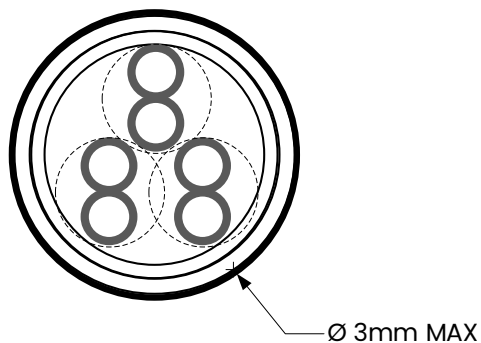


Cable	Twisted pair , Ø2.45 ±0.15 mm
Wire	AWG 30 25/44 tinned copper Insulation - PFE Ø0.15 OD Ø0.6 ±0.05 mm
Shield	Thinned copper braided 95%
Filler	PTFE
Binder	EPTFE
Jacket	FPE Black
T. Rating	-55 ° C : + 150 ° C

DB9	Function	Color	
6	Return	Black	
4	5 VDC	RED	XX
7	Data +	Green	
8	Data -	Yellow	XX
2	Clock +	Gray	
3	Clock -	Blue	XX
	Shield		

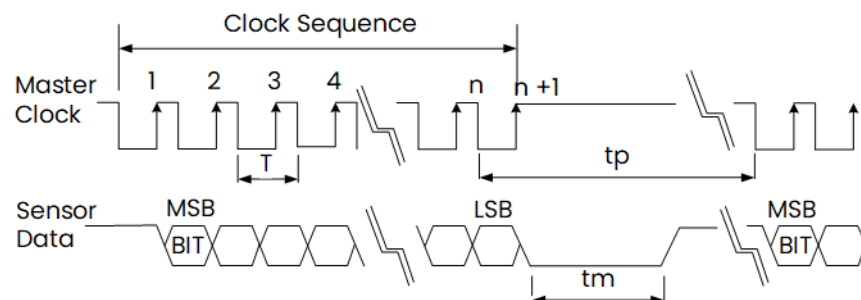

	Description	Recommended
f	clock frequency (max)	1.8 MHz
tp	pause time	> 21 µsec
tm	transfer time (monoflop time)	= 20 µsec
BIT	Build In Test (MSB , Optional)	

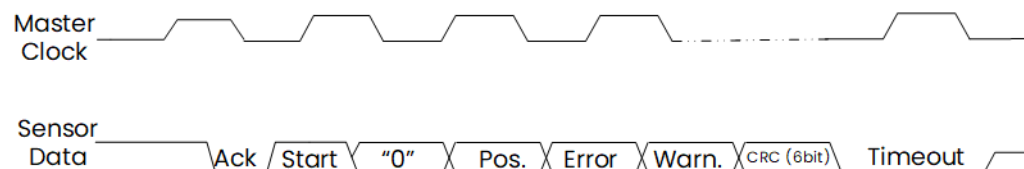

	Description	
Pos.	Number of data bits	18 - 22
Error	Error bit - active low	1
Warn.	Warning bit - active low	1
CRC	CRC polynomial inverted	6



Sensor manufactured by statum motion are warranted to be free from defects in materials and workmanship for a period of 12 months from the date of shipment.

Warranty Coverage

This warranty covers the replacement or repair of faulty encoders at no charge, provided that the following conditions are met:

- The sensor was installed, operated, and stored in accordance with the manufacturer's instructions.
- The sensor was not subjected to improper installation, misuse, or abuse.
- The sensor was not disassembled or repaired by the customer.

Ordering

STD34

a

b

c

d

e

f

a	b	c	d	e	f
Resolution ¹	Comm.	Cable	Length	Board	Custom
18-22 ¹	B – Biss C S – SSI	1 – Flying leads 2 – DB9 connector	1 – 250 mm 2 – 500 mm	1 – Standard 2 – Conformal coating	

¹ – higher resolution – optional up to 26 bit.

Stator board protection	
PCB assemble	IPC 610 Class 3
PCB	IPC 620 Class 3
Sensor harness assembly	IPC-A 620 Class 3
Conformal coating (optional)	UVCL ; UV cure conformal coating




Product specifications are subject to change without prior notice.

The product images shown are for illustration purposes only and may not be an exact representation of the product

statum motion LTD
Phone: +972 (0)4 644 5454
Email: info@statum-motion.com
www.statum-motion.com
Kiryat Tivon Israel



statum motion **Studio** provides an intuitive interface for configuring of the position sensors. It operates with the statum compact protocol over RS422, offering features such as functionality verification, zero setup, jitter testing and more.

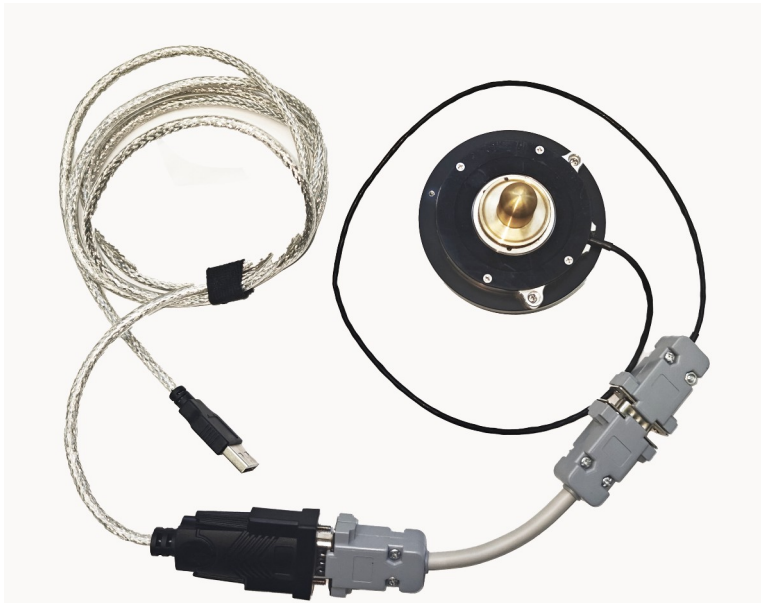

statum motion **Demo Kit** includes a position sensor mounted on a rotating jig and an RS422 to USB converter.